




## Photovoltaic cables - Solar EN50618 H1Z2Z2-K 1/1 kV

● fire behaviour - Dca - s2, d2

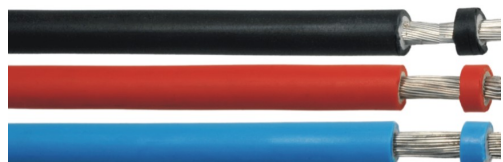

### Technical attributes

Standards	EN 50618
Conductor material	Cu, tinned
Conductor type	flexible
Conductor standard	DIN VDE 0295/IEC 60228
Conductor category	5
Core insulation	halogen-free, cross-linked polymer
Core colours	light grey
Outer sheath	halogen-free, cross-linked polymer
Outer sheath colour	black - red - blue
Temperature range min.	-40 °C
Temperature range max.	+90 °C
Temperature at conductor max. (20.000 h)	+120 °C
Nominal voltage Uo/U	1,0/1,0 kV (AC) - 1,5/1,5 kV (DC)
Test voltage	6,5 kV (AC)
Max. voltag Um	1,8 kV (DC)
Minimum bending radius, fixed installation	5 x cable-Ø
Fire behaviour	Dca - s2, d2
RoHS-compliant	ja

### Description

Single-core flexible cable is suitable for photovoltaic and solar systems with cross-linked polymer insulation and halogen-free outer sheath. Expected period of use under normal conditions is at least 25 years. The cable is suitable for the interconnection of the various elements of photovoltaic systems, suitable for fixed installations outdoors and indoors, also suitable for direct ground laying (the rodent resistance can be optimized by using protective tubes).

### Note

- fire behaviour - Dca - s2, d2
- halogen-free EN 50525-1 Annex B (EN 50267-2-1, EN 50267-2-2, IEC 60754-1, IEC 60754-2)
- low smoke emission IEC 61034, EN 61034 (light transmittance > 60%)
- ozone-resistant EN 60811-403 Test Method A, EN 50396 clause 8.1.3 Test Method B
- UV-resistant EN 50618 Annex E, EN 50289-4-17 (Method A), EN ISO 4892-1 /-2 tensile strength and elongation at break after 720h (360 Cycles) of exposure to UV lights
- flame-retardant IEC/EN 60332-1-2
- water-resistant AD8 category

### Product table

product number	product name	Weight ca. [kg]	Cu-weight [kg_km]	Outer-Ø ca. [mm]	Outer sheath colour
04329001	Solar 1 x 4 EN50618 H1Z2Z2-K 1/1 kV bk	58,20	38,40	5,40	black
04329002	Solar 1 x 4 EN50618	58,20	38,40	5,40	red



Photovoltaic cables - Solar EN50618 H1Z2Z2-K 1/1 kV

● fire behaviour - Dca - s2, d2

product number	product name	Weight ca. [kg]	Cu-weight [kg_km]	Outer-Ø ca. [mm]	Outer sheath colour
	H1Z2Z2-K 1/1 kV rd				
04329003	Solar 1 x 4 EN50618 H1Z2Z2-K 1/1 kV bl	58,20	38,40	5,40	blue
04329004	Solar 1 x 6 EN50618 H1Z2Z2-K 1/1 kV bk	79,40	57,60	6,20	black
04329005	Solar 1 x 6 EN50618 H1Z2Z2-K 1/1 kV rd	79,40	57,60	6,20	red
04329006	Solar 1 x 6 EN50618 H1Z2Z2-K 1/1 kV bl	79,40	57,60	6,20	blue
04329007	Solar 1 x 10 EN50618 H1Z2Z2-K 1/1 kV bk	128,40	96,00	7,40	black
04329010	Solar 1 x 10 EN50618 H1Z2Z2-K 1/1 kV rd	128,40	96,00	7,40	red
04329011	Solar 1 x 10 EN50618 H1Z2Z2-K 1/1 kV bl	128,40	96,00	7,40	blue
04329008	Solar 1 x 16 EN50618 H1Z2Z2-K 1/1 kV bk	184,50	153,60	10,10	black
04329012	Solar 1 x 16 EN50618 H1Z2Z2-K 1/1 kV rd	184,50	153,60	10,10	red
04329013	Solar 1 x 16 EN50618 H1Z2Z2-K 1/1 kV bl	184,50	153,60	10,10	blue